



## TECHNICAL DATA / FEATURES

- dimensions: 140x140x81
- light functions: parking, stop light (main), direction indicator, number plate illumin.
- function markings: RD, SID, 2aD, L
- traffic: right-hand / left-hand
- source of light: P21W and R10W
- maximum power: 21W, 10W
- nominal voltage: 12V-24V DC
- optics: FF
- IP rating: IP55
- mounting: 2xM6
- housing's material: plastic
- housing's colour: black
- lens' material: plastic
- built-in connectors: -
- other: shock absorbing system



## ADDITIONAL INFORMATION

To be mounted on the back of the vehicle. Possible installation as: left-side, right-side or in vertical position.

Equipped with an extra connection for additional lights, e.g. a portable lamp or a work lamp.

It is possible to install needed connectors on wire (on request).

Replacement parts:

composite lens - cat. No. A.41000

Applications:

- trucks
- trailers
- tractors and slow-moving vehicles


Dedicated application:

A - tractors:

- Zetor: Proxima and Forterra
- Ursus, Farmtrac

B - agricultural machines Claas: combine harvesters, mowers, balers, silage trailers

## DIMENSIONS

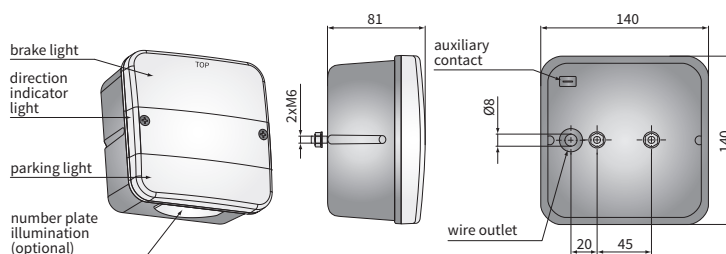

Cat. number	Homologation code	Light functions				Function markings				Accessories					Side	right	left	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	Application	dedicated	Packaging / pc	carton box
		parking	stop light (main)	direction indicator	number plate illumin.	RD	SID	2aD	L	bulb P21W 12V	bulb R10W 12V	cabl 0,25 m	cabl 3,3 m	cabl 3,6 m												
<b>LT2.26600</b>	006	✓	✓	✓		✓	✓	✓							✓	✓							A	1		
LT2.26606	006	✓	✓	✓		✓	✓	✓		✓	✓				✓	✓							A	1		
<b>LT2.26601</b>	006	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓	✓		✓		4			A	1		
LT2.26603	006	✓	✓	✓		✓	✓	✓		✓	✓		✓		✓	✓							A	1		
LT2.26602	006	✓	✓	✓		✓	✓	✓		✓	✓	✓			✓	✓							A	1		
<b>LT2.26604</b>	006	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓				4			B	1		
LT2.26605	006	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓		✓		4			B	1		